

PRODUCT SUMMARY

KODAK KAI-01150 IMAGE SENSOR

1280 (H) X 720 (V) PROGRESSIVE SCAN INTERLINE CCD IMAGE SENSOR

DESCRIPTION

The KODAK KAI-01150 Image Sensor is a 720p format (1280 x 720 pixel) CCD in a 1/2" (8 mm diagonal) optical format. Based on the KODAK TRUESENSE 5.5 micron Interline Transfer CCD Platform, the sensor features broad dynamic range, excellent imaging performance, and a flexible readout architecture that enables use of 1, 2, or 4 outputs for full resolution readout of 138 frames per second. A vertical overflow drain structure suppresses image blooming and enables electronic shuttering for precise exposure control.

The sensor is available with the KODAK TRUESENSE Color Filter Pattern, a technology which provides a 2x improvement in light sensitivity compared to a standard color Bayer part.


The sensor shares common PGA pin-out and electrical configurations with other devices based on the KODAK TRUESENSE 5.5 micron Interline Transfer CCD Platform, allowing a single camera design to support multiple members of this sensor family.

FEATURES

- Bayer Color Pattern, KODAK TRUESENSE Color Filter Pattern, and Monochrome configurations
- Progressive scan readout
- Flexible readout architecture
- High frame rate
- High sensitivity, low noise architecture
- Excellent smear performance
- Package pin reserved for device identification

APPLICATIONS

- Intelligent Traffic Systems
- Security / Surveillance
- Industrial Imaging

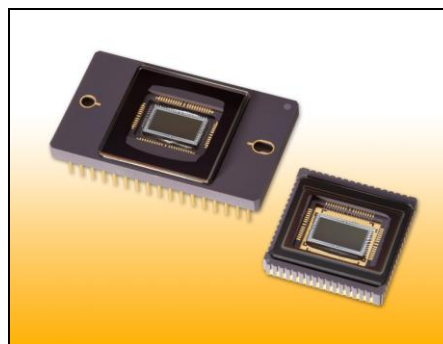

Parameter	Typical Value
Architecture	Interline CCD; Progressive Scan
Total Number of Pixels	1364 (H) x 760 (V)
Number of Effective Pixels	1320 (H) x 736 (V)
Number of Active Pixels	1280 (H) x 720 (V)
Pixel Size	5.5 μm (H) x 5.5 μm (V)
Active Image Size	7.04 mm (H) x 3.96 mm (V) 8.08 mm (diagonal) 1/2" optical format
Aspect Ratio	16:9
Number of Outputs	1, 2, or 4
Charge Capacity	20,000 electrons
Output Sensitivity	34 $\mu\text{V}/\text{e}^-$
Quantum Efficiency R, G, B (-CBA, -PBA) Pan (-ABA, -PBA)	31%, 42%, 43% (620, 540, 470 nm) 50% (500 nm)
Base ISO KAI-01150-ABA KAI-01150-CBA KAI-01150-PBA	330 150 330
Read Noise (f= 40MHz)	12 electrons rms
Dark Current Photodiode / VCCD	7 / 140 electrons/s
Dark Current Doubling Temp Photodiode / VCCD	7 °C / 9 °C
Dynamic Range	64 dB
Charge Transfer Efficiency	0.999999
Blooming Suppression	> 300 X
Smear	-100 dB
Image Lag	< 10 electrons
Maximum Pixel Clock Speed	40 MHz
Maximum Frame Rate Quad / Dual / Single Output	138 / 69 / 36 fps
Package Options	68 pin PGA 64 pin CLCC
Cover Glass	AR Coated, 2 Sides

All parameters are specified at T = 40° C unless otherwise noted.

ORDERING INFORMATION

Catalog Number	Product Name	Description	Marking Code
4H2128	KAI-01150-ABA-JD-BA	Monochrome, Telecentric Microlens, PGA Package, Sealed Clear Cover Glass with AR coating (both sides), Standard Grade	KAI-01150-ABA Serial Number
4H2129	KAI-01150-ABA-JD-AE	Monochrome, Telecentric Microlens, PGA Package, Sealed Clear Cover Glass with AR coating (both sides), Engineering Grade	
4H2130	KAI-01150-ABA-FD-BA	Monochrome, Telecentric Microlens, CLCC Package, Sealed Clear Cover Glass with AR coating (both sides), Standard Grade	
4H2131	KAI-01150-ABA-FD-AE	Monochrome, Telecentric Microlens, CLCC Package, Sealed Clear Cover Glass with AR coating (both sides), Engineering Grade	
4H2132	KAI-01150-CBA-JD-BA	Color (Bayer RGB), Telecentric Microlens, PGA Package, Sealed Clear Cover Glass with AR coating (both sides), Standard Grade	KAI-01150-CBA Serial Number
4H2133	KAI-01150-CBA-JD-AE	Color (Bayer RGB), Telecentric Microlens, PGA Package, Sealed Clear Cover Glass with AR coating (both sides), Engineering Grade	
4H2134	KAI-01150-CBA-FD-BA	Color (Bayer RGB), Telecentric Microlens, CLCC Package, Sealed Clear Cover Glass with AR coating (both sides), Standard Grade	
4H2135	KAI-01150-CBA-FD-AE	Color (Bayer RGB), Telecentric Microlens, CLCC Package, Sealed Clear Cover Glass with AR coating (both sides), Engineering Grade	
4H2136	KAI-01150-PBA-JD-BA	Color (KODAK TRUESENSE CFA), Telecentric Microlens, PGA Package, Sealed Clear Cover Glass with AR coating (both sides), Standard Grade	KAI-01150-PBA Serial Number
4H2137	KAI-01150-PBA-JD-AE	Color (KODAK TRUESENSE CFA), Telecentric Microlens, PGA Package, Sealed Clear Cover Glass with AR coating (both sides), Engineering Grade	
4H2139	KAI-01150-PBA-FD-BA	Color (KODAK TRUESENSE CFA), Telecentric Microlens, CLCC Package, Sealed Clear Cover Glass with AR coating (both sides), Standard Grade	
4H2140	KAI-01150-PBA-FD-AE	Color (KODAK TRUESENSE CFA), Telecentric Microlens, CLCC Package, Sealed Clear Cover Glass with AR coating (both sides), Engineering Grade	

See ISS Application Note "Product Naming Convention" (MTD/PS-0892) for a full description of naming convention used for KODAK image sensors.

For reference documentation, including information on evaluation kits, visit our Web Site at www.kodak.com/go/imagers.

Please address all inquiries and purchase orders to:

Image Sensor Solutions
Eastman Kodak Company
Rochester, New York 14650-2010

Phone: (585) 722-4385
Fax: (585) 477-4947
E-mail: imagers@kodak.com

Kodak reserves the right to change any information contained herein without notice. All information furnished by Kodak is believed to be accurate.