




Kodak Lithium Battery

KL2CR5

Effective : March 2005

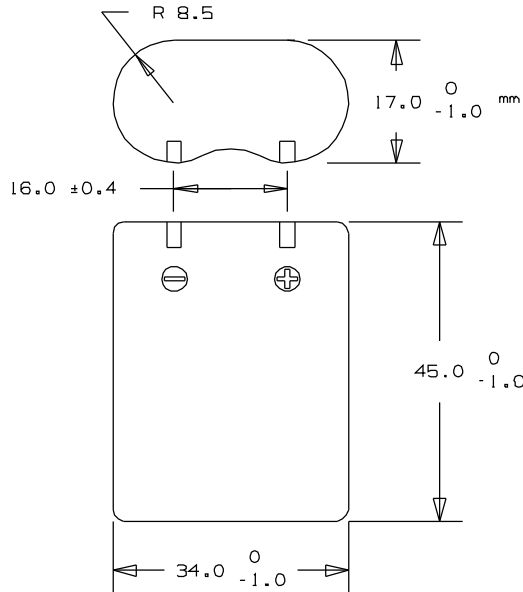


System:	Lithium/Manganese Dioxide, Li/MnO ₂
Designation:	ANSI 5032LC, IEC 2CR5
Nominal Voltage:	6.0 Volts (2 cells, 3 volts each)
Capacity:	1550 mAh at 2.5 mA to 3.6 volts
Maximum Discharge:	1,000 mA Continuous, 3,000 mA Pulse
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage
Average Weight:	42 grams
Volume:	26.0 cm ³
Terminals:	Flat Recessed Contacts
Jacket:	Plastic Housing / Label
Lithium Content:	<0.5 grams/Cell, <1.0 grams/Battery
Shelf Life:	10 years to 90% of original capacity

NOTE: 1) Recognized under the Component Program of Underwriters Laboratories Inc.
2) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Discharge Characteristics KL2CR5

TEMP: 23°C

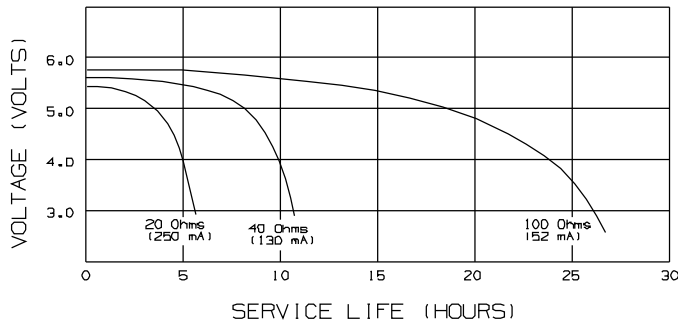


Typical Temperature Characteristics KL2CR5

LOAD: 400 Ohms (14 mA)

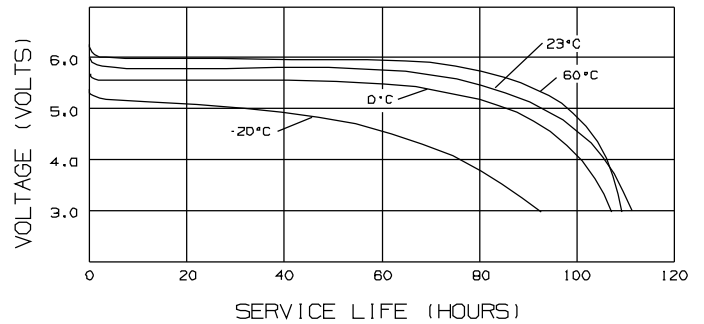


Typical Discharge Characteristics KL2CR5

TEMP: 23°C

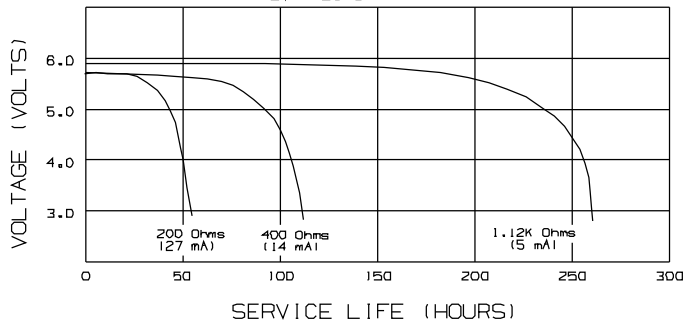

Typical Pulse Discharge Characteristics KL2CR5

LOAD: 900mA CURRENT PULSE 3 SEC ON / 27 SEC OFF - CONTINUOUS

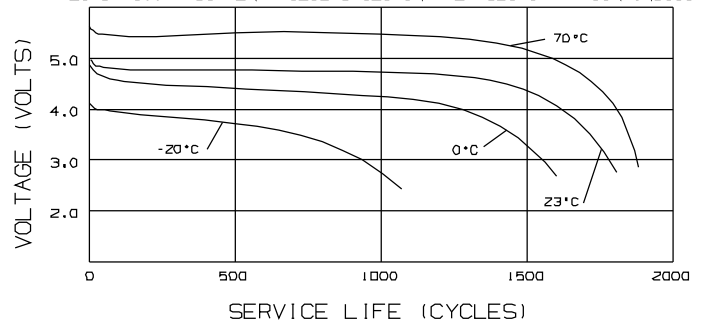

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries