




Kodak Silver Oxide Battery

KS28


Effective : April 2004

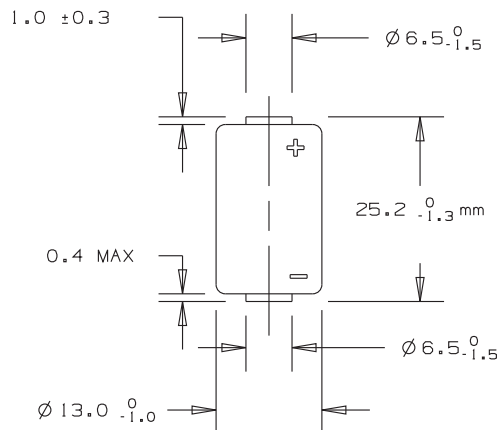


System:	Silver Oxide, Zn/Ag ₂ O
Designation:	ANSI 1406SOP, IEC 4SR44
Nominal Voltage:	6.0 Volts
Capacity:	130 mAh at 20 KOhms to 3.6 Volts
Maximum Discharge:	60 mA
Temperature Range:	-10°C to 54°C Operating -10°C to 45°C Storage
Average Weight:	11.1 grams
Volume:	3.30 cm ³
Terminals:	Flat Contacts
Jacket:	Metal Litho

NOTE: 1) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Discharge Characteristics KS28

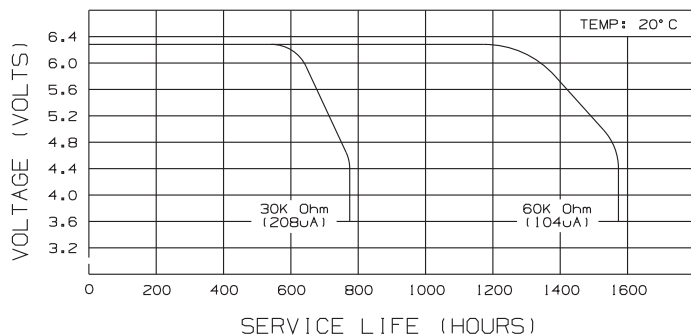


Typical Temperature Characteristics KS28

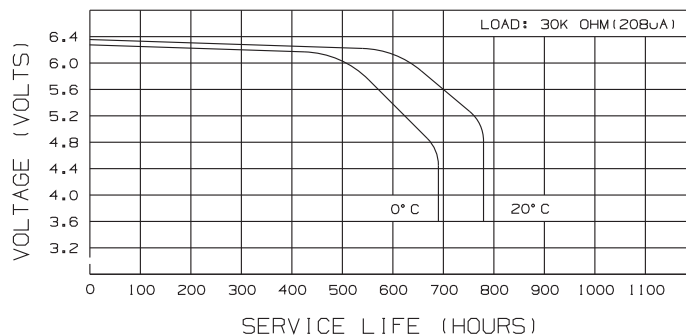

Typical Shelf Life Characteristics KS28

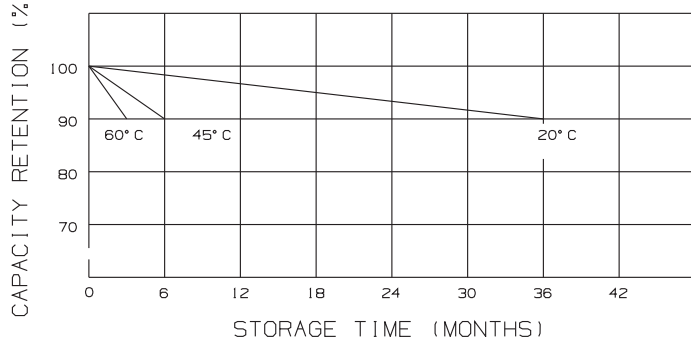

Typical Temperature Characteristics KS28

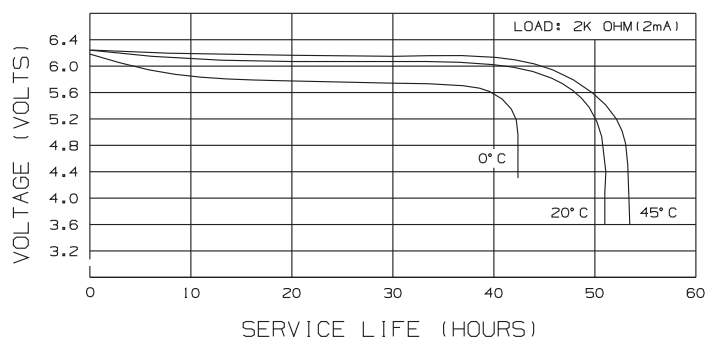

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact EASTMAN KODAK COMPANY 343 State Street Rochester, New York 14650-0811 1-800-242-2424 www.kodak.com/go/batteries