




Kodak Ni-MH Rechargeable Battery

KAA2HR

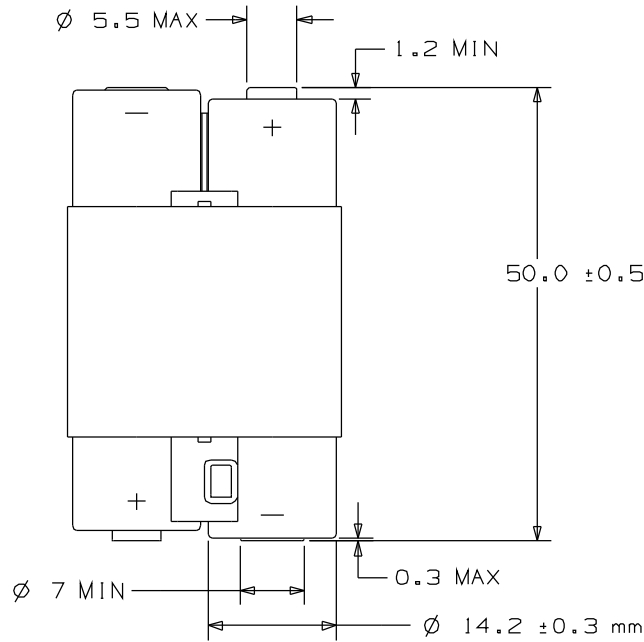


Effective : March 2005

System:	Nickel-Metal Hydride
Designation:	ANSI , IEC
Nominal Voltage:	1.2 Volts X 2
Capacity	typical: 2100 mAh at 210 mA to 1.0 Volt minimum: 2000 mAh at 210 ma to 1.0 Volt
Maximum Discharge:	6.4A Continuous
Temperature Range:	0°C to +50°C Operating -20°C to +30°C Storage 0°C to +40°C Charging
Average Weight:	55.0 grams
Volume:	16.0 cm ³
Terminals:	Flat Contacts
Jacket:	PVC Label
Internal Impedance:	0.020 Ohms (typical) (Individual Cell)
Charge Time:	2.5 hrs (fast charge)
Charging Cycles:	Up To 1000. Maximum life is achieved by shallow discharge and charge condition.

NOTE: 1) Individual Cells comply with ANSI C18 and IEC 60086 standards.
2) This Battery may need to be charged and discharged 3 to 4 times to reach full rated capacity when new or after long periods of non-use.

Discharge Rate Characteristics of KAA2HR


CHARGE: 160mA X 16HR / REST: 1HR / AMBIENT TEMP: 25°C

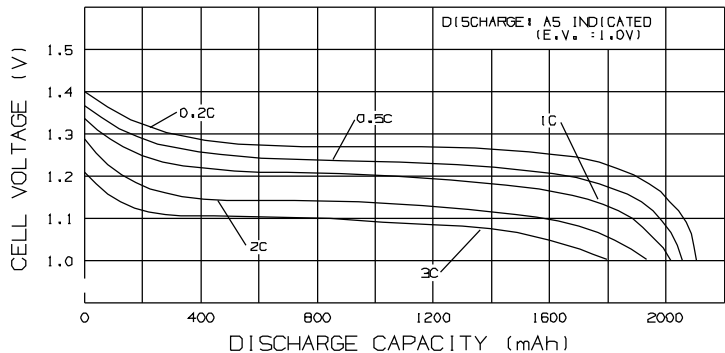

IC rate=Typ. mAh capacity/hour:discharge rate in mA's

Storage Characteristics of KAA2HR

CHARGE: 160mA X 16HR / DISCHARGE: 1.6DA / E.V.: 1.0V

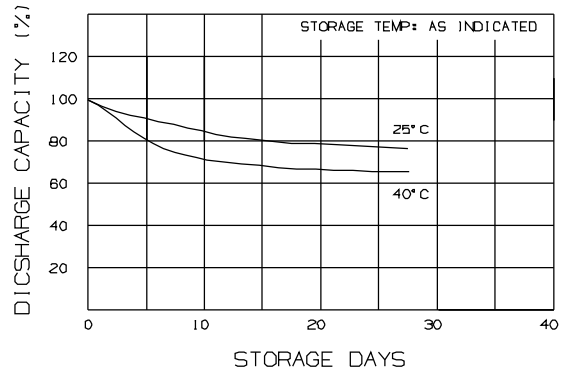

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries