Kodak K620E Value Charger

Effective: March 17, 2009

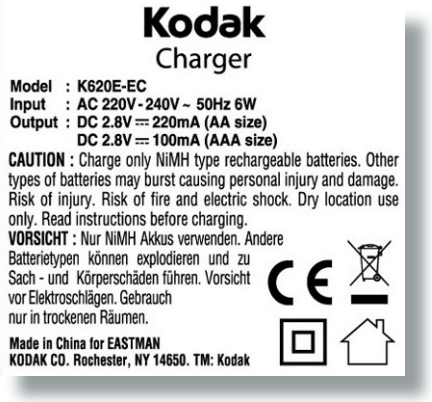

Designation	**Kodak K620E Ni-MH Value Charger**		
Dimensions	L 106 mm x W 66 mm x H 32 mm (without plug)		
Weight	177 g ±10%		
Battery Size Application	**AA and AAA**		
Battery Type	**Ni-MH**		
Battery Count	**2 or 4 AA and 2 or 4 AAA**		
Display Device	**LED on** = Power on Charging	**LED off** = Power off Not charging	
Input Power	**220 - 240 V AC/60 Hz, 6 W max**		
Output Power	**2.8 V**		
Output-Charge Current	Max. 220 mA ± 10% for AA batteries Max. 100 mA ± 10% for AAA batteries		
Charge Time (approx.)	Ni-MH AA (2500mAh)	1-4 batteries	13.5 hours
	Ni-MH AA (2100mAh)	1-4 batteries	11.5 hours
	Ni-MH AA (1800mAh)	1-4 batteries	10 hours
	Ni-MH AAA (900mAh)	1-4 batteries	11 hours
Charge Protection	Mechanical reverse polarity protection (wrong insertion)		
Compliance	1. Safety: IEC 60335-2 2. EMI: EN 55022, EN 55024, EN 61000-3-2 & EN 61000-3-3		
Approvals	CE, C-Tick, CCC		

220mA/100mA version

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact Eastman Kodak Company, 343 State Street, Rochester NY 14650-0811
Phone 1-800-242-2424. www.kodak.com/go/batteries

© Eastman Kodak Company, 2009 Kodak is a trademark.