


Kodak Lithium Battery

KCR2025


Effective : March 2005

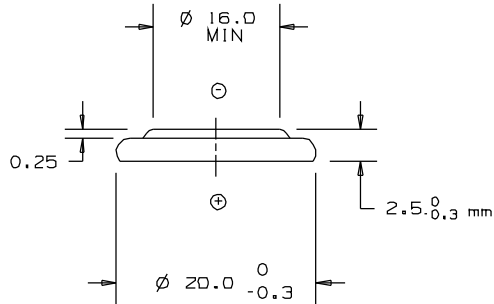


System:	Lithium/Manganese Dioxide, Li/MnO ₂
Designation:	ANSI 5003LC, IEC CR2025
Nominal Voltage:	3.0 Volts
Capacity:	170mAh @ 10 KOhms to 2.0 Volts
Maximum Discharge:	0.20 mA Continuous, 15 mA Pulse
Temperature Range:	-20°C to 60°C Operating -20°C to 45°C Storage
Average Weight:	2.5 grams
Volume:	0.75 cm ³
Terminals:	Flat Contacts
Jacket:	None
Lithium Content:	<0.5 grams/Battery
Shelf Life:	10 years to 90% of original capacity.

NOTE: 1) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


Typical Load Characteristics KCR2025

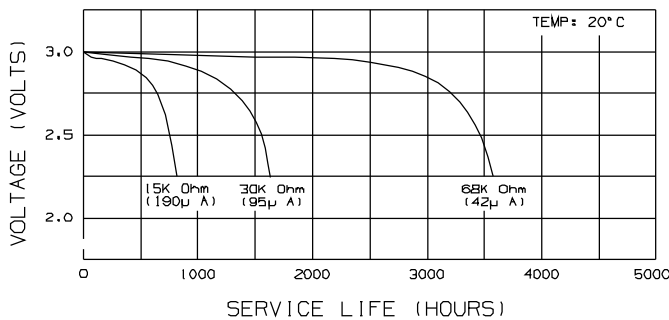


Typical Temperature Characteristics KCR2025

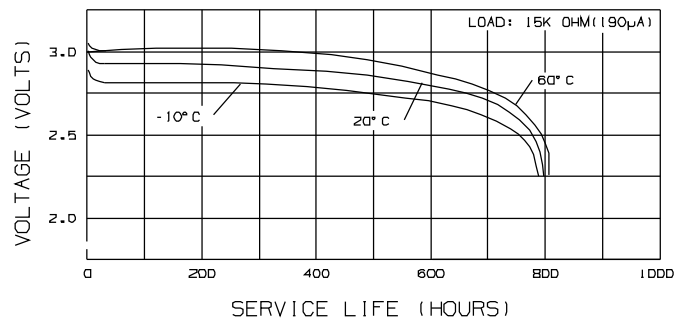

Operating Voltage v/s Load Resistance KCR2025

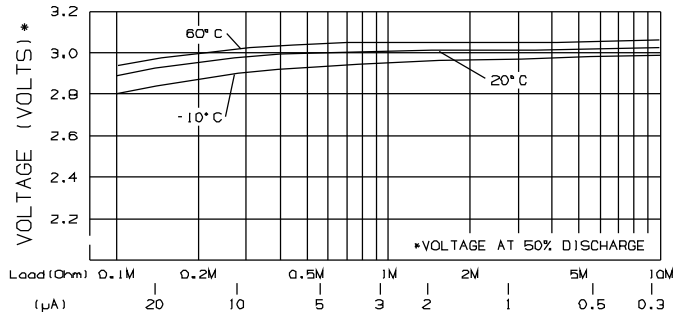

Capacity v/s Load Resistance KCR2025

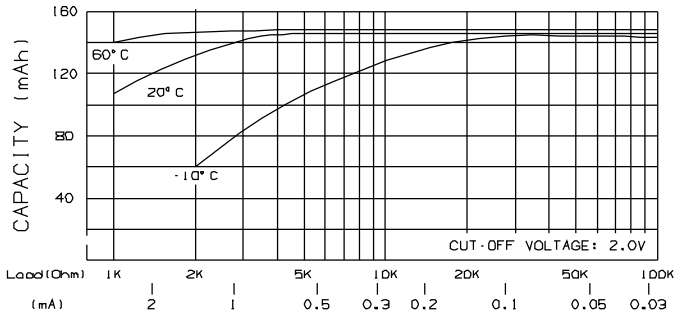

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact
EASTMAN KODAK COMPANY
343 State Street
Rochester, New York 14650-0811
1-800-242-2424
www.kodak.com/go/batteries