




# Kodak Silver Oxide Battery

KS76


Effective : April 2004

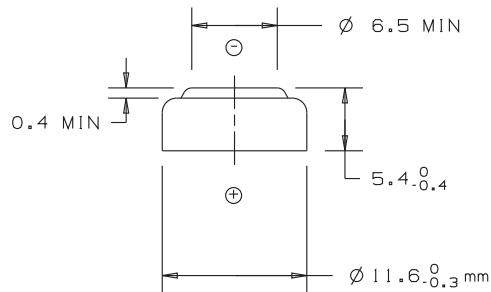


System:	Silver Oxide, Zn/Ag <sub>2</sub> O
Designation:	ANSI 1107SOP, IEC SR44
Nominal Voltage:	1.55 Volts
Capacity:	130 mAh at 5.6 KOhms to 1.2 Volts
Maximum Discharge:	60 mA Continuous
Temperature Range:	-10°C to 54°C Operating -10°C to 45°C Storage
Average Weight:	2.4 grams
Volume:	.51 cm <sup>3</sup>
Terminals:	Flat Contacts
Jacket:	None

NOTE: 1) This battery complies with: ANSI C18, IEC 60086, & EEC directive 91/157 standards.


### Typical Discharge Characteristics KS76

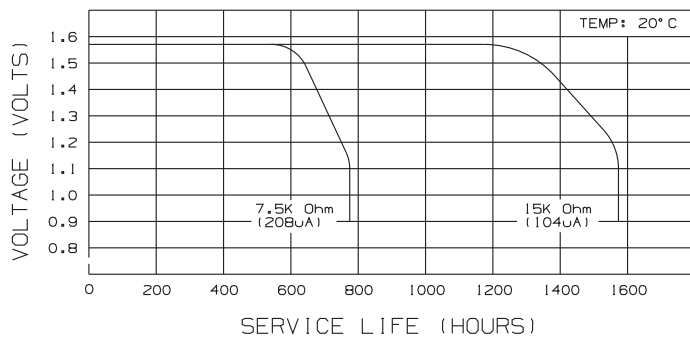


### Typical Temperature Characteristics KS76

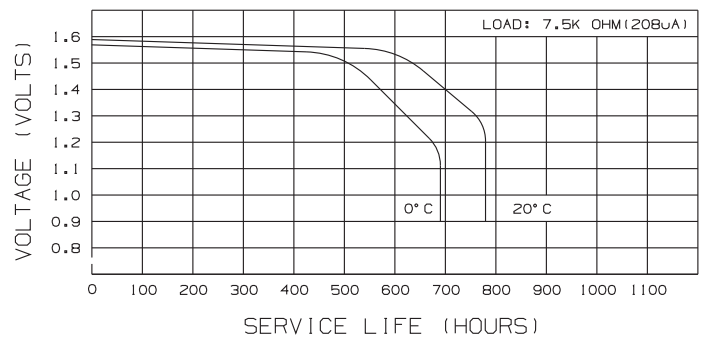

### Typical Shelf Life Characteristics KS76

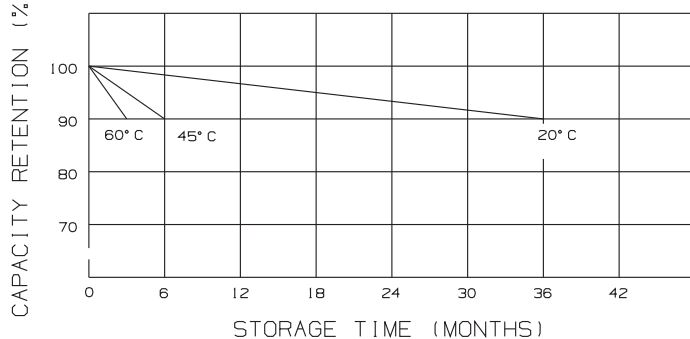

### Typical Shelf Life Comparison KS76

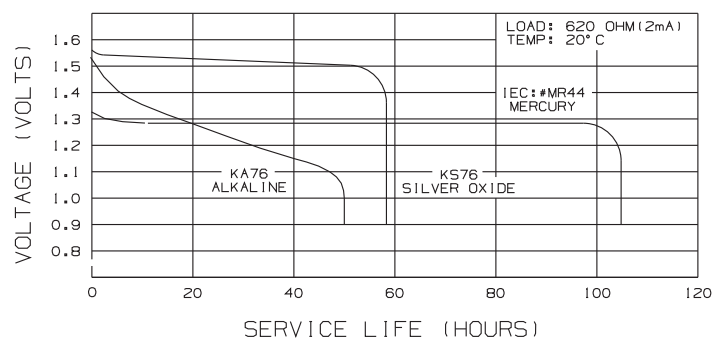

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact  
EASTMAN KODAK COMPANY  
343 State Street  
Rochester, New York 14650-0811  
1-800-242-2424  
[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)